


High carbon turnbuckle eye/jaw - art. 2270

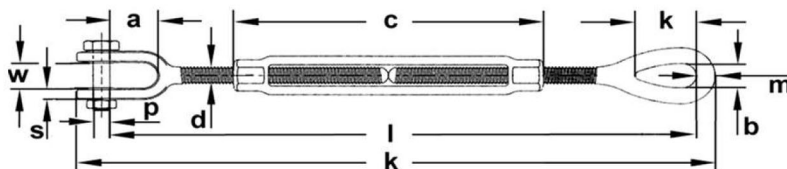

* Reference standard	Industrial standard generally complying to ASTM F1145-92 (formerly FF-T-791b)
* Type of steel	High carbon steel C 45 UNI EN 10083-1 - W.N. 1.1191 - class 5
* Design factor (F.O.S.)	5 : 1
* Standard surface finish	Hot dip galvanization, hexagonal heads of body blue RAL 5017 painted
* Technical features	High WLL with small dimensions and weight - up to four take-up lengths for thread size - standard supplied with locking nuts
* Applications	Lifting, suspension and lashing of load in industry and marine
* Warnings	WLL apply for pull along the turnbuckle's axe - working temperature -20° to +200° C - please refer to the technical part of rigging screw section for deepening and other warnings

Technical data																	
code	inch		WLL t ⁽¹⁾	usable length l			overall length k		measures mm								approx. weight per pc. kg
	thread d	nominal take-up		closed	open	half open	closed	open	width w	depth a	dia. p	length c	thickn. s	width b	depth k	dia. m	
TG2271006	3/8	6	0,54	273	409	341	305	441	12	21	8	183	9	13	29	10	0,51
TG2271306	1/2	6	1	305	435	370	344	474	16	26	10	193	11	18	36	12	0,89
TG2271309	1/2	9	1	380	587	483,5	418	625	16	26	10	269	11	18	36	12	1,1
TG2271312	1/2	12	1	455	739	597	494	778	16	26	10	346	11	18	36	12	1,31
TG2271606	5/8	6	1,59	346	469	407,5	406	529	18	32	13	203	14	21	44	14	1,58
TG2271609	5/8	9	1,59	421	622	521,5	481	682	18	32	13	279	14	21	44	14	1,84
TG2271612	5/8	12	1,59	496	773	634,5	556	833	18	32	13	356	14	21	44	14	2,22
TG2271906	3/4	6	2,36	368	487	427,5	438	557	24	38	16	213	16	25	54	17	2,34
TG2271909	3/4	9	2,36	442	639	540,5	512	709	24	38	16	289	16	25	54	17	2,72
TG2271912	3/4	12	2,36	518	791	654,5	588	861	24	38	16	366	16	25	54	17	2,95
TG2271918	3/4	18	2,36	671	1095	883	740	1164	24	38	16	518	16	25	54	17	3,3
TG2272212	7/8	12	3,27	559	825	692	636	902	27	42	19	376	19	32	61	20	4,4
TG2272218	7/8	18	3,27	712	1131	921,5	789	1208	27	42	19	528	19	32	61	20	5,46
TG2272506	1	6	4,54	447	555	501	532	640	30	50	22	233	20	36	75	24	4,66
TG2272512	1	12	4,54	598	859	728,5	683	944	30	50	22	386	20	36	75	24	6,35
TG2272518	1	18	4,54	750	1164	957	835	1249	30	50	22	538	20	36	75	24	7,98
TG2272524	1	24	4,54	902	1469	1185,5	987	1554	30	50	22	690	20	36	75	24	8,39
TG2273212	1.1/4	12	6,9	641	916	778,5	748	1023	44	71	28	385	26	46	90	30	10,92
TG2273218	1.1/4	18	6,9	793	1218	1005,5	900	1325	44	71	28	537	26	46	90	30	11
TG2273224	1.1/4	24	6,9	961	1538	1249,5	1069	1646	44	71	28	689	26	46	90	30	12,9
TG2273812	1.1/2	12	9,71	675	941	808	806	1072	52	71	35	401	28	54	105	32	13,1
TG2273818	1.1/2	18	9,71	825	1244	1034,5	956	1375	52	71	35	553	28	54	105	32	14,7
TG2273824	1.1/2	24	9,71	980	1550	1265	1111	1681	52	71	35	705	28	54	105	32	17,8
TG2274518	1.3/4	18	12,7	933	1310	1121,5	1095	1472	59	86	42	577	33	60	119	38	22,3
TG2274524	1.3/4	24	12,7	1084	1614	1349	1246	1776	59	86	42	729	33	60	119	38	27,5
TG2275024	2	24	16,78	1153	1672	1412,5	1338	1857	63	93	50	746	41	69	147	46	42,9
TG2276324	2.1/2	24	27,22	1254	1830	1542	1479	2055	75	114	57	800	41	80	165	51	68
TG2277024	2.3/4	24	34,02	1305	1878	1591,5	1561	2134	90	110	70	800	41	84	178	57	91

⁽¹⁾ metric tons of 1.000 kgs

The sizes in bold character are stock-items.