


## Safety latch kit for hooks art. 3200 - 3220 - 3220/C - 3190

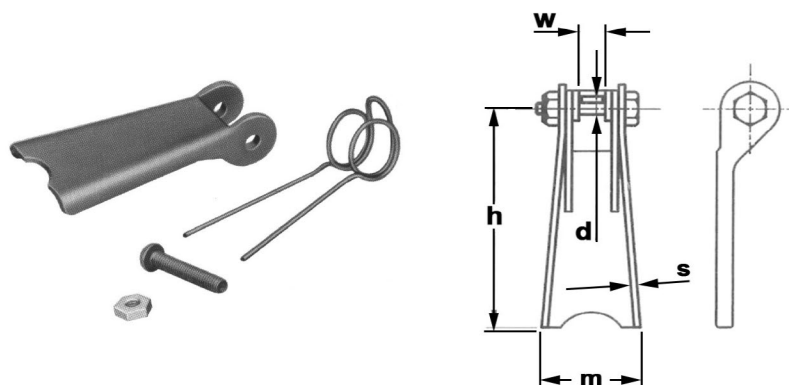

* Reference standard	Industrial standard
* Type of steel	Low carbon steel
* Standard surface	Electro galvanized
* Applications	Safety device on lifting hook against the loss of load
* Warnings	The safety norms prescribe the use of hook with safety latch

code	for hook WLL t		dimensions mm					approx. weight per pc. kg
	carbon steel	alloy steel	height h	width m	pin diameter d			
					opening w	thickness s		
VSSG00075	0,75	1,25	32	15	3	6	1	0,007
VSSG00100	1	1,6	34	15	3	6	1	0,008
VSSG00150	1,5	2,5	45	22	4	8	1	0,013
VSSG00200	2	3,2	45	22	4	8	1,25	0,015
VSSG00300	3	4,5	56	26	4	9	1,5	0,022
VSSG00500	5	7	67	31	5	9	2	0,044
VSSG00750	7,5	11	86	38	6	9,5	2	0,058
VSSG01000	10	15	90	40	6	14	2	0,086
VSSG01500	15	22	134	72	8	20	2,5	0,256
VSSG02000	20	30	134	72	8	24	3	0,290

\* metric tons of 1.000 kg

The sizes in bold character are stock-items.

Other types of safety latch, FOR any kind of hook, available upon request