


Eyenet according to DIN 582 ISO coarse metric thread - art. 5820

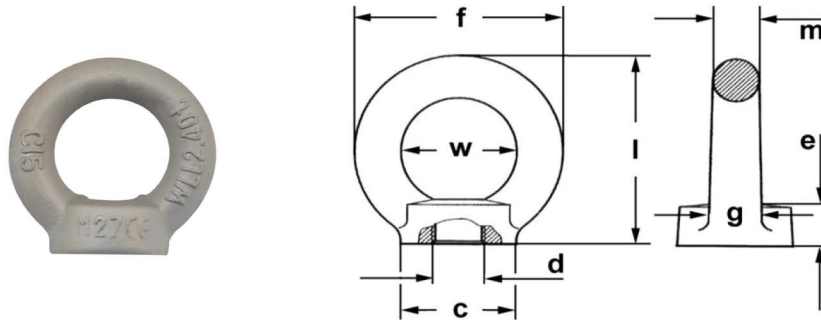

* Reference standard	DIN 582
* Type of steel	C15 UNI EN 10084 steel - W.N. 1.0401 - class 4
* Design factor	4 : 1
* Standard surface	Electro galvanised; upon request, ungalvanised (self-coloured)
* Applications	Lifting and suspending of loads in industry and marine
* Warnings	Working temperature -20° +80° C. - please refer to the technical part of attachment section for deepening and other warnings.

Dimensional tolerances eye width w +/- 1 mm

Technical data													
ungalva code	galva code	WLL t (*)		measures mm									approx. kg/pc.
		along the axe	at 45° (**)	thread		width	width	dia.	thickness		dia.	height	
				dia. d	pitch	w	f	c	e	m	g	l	
GLFEMOC06	GLFEMCZ06	0,07	0,05	6	1	20	36	20	6	8	10	36	0,042
GLFEMOC08	GLFEMCZ08	0,14	0,1	8	1,25	20	36	20	6	8	10	36	0,052
GLFEMOC10	GLFEMCZ10	0,23	0,17	10	1,5	25	45	25	8	10	12	45	0,094
GLFEMOC12	GLFEMCZ12	0,34	0,24	12	1,75	30	54	30	10	12	14	53	0,16
GLFEMOC14	GLFEMCZ14	0,49	0,35	14	2	30	54	30	10	12	14	53	0,16
GLFEMOC16	GLFEMCZ16	0,7	0,5	16	2	35	63	35	12	14	16	62	0,24
GLFEMOC18	GLFEMCZ18	0,9	0,63	18	2,5	35	63	35	12	14	16	62	0,24
GLFEMOC20	GLFEMCZ20	1,2	0,86	20	2,5	40	72	40	14	16	19	71	0,35
GLFEMOC22	GLFEMCZ22	1,5	1,05	22	2,5	40	72	40	14	16	19	71	0,35
GLFEMOC24	GLFEMCZ24	1,8	1,29	24	3	50	90	50	18	20	24	90	0,71
GLFEMOC27	GLFEMCZ27	2,5	1,8	27	3	54	98	62	20	22	26	99	1,02
GLFEMOC30	GLFAMCZ30	3,2	2,3	30	3,5	60	108	65	22	24	28	109	1,32
GLFEMOC33	GLFEMCZ33	4,2	3,1	33	3,5	60	108	65	22	24	28	109	1,7
GLFEMOC36	GLFEMCZ36	4,6	3,3	36	4	70	126	75	26	28	32	128	2,08
GLFEMOC39	GLFEMCZ39	6	4,4	39	4	80	144	85	30	32	38	147	2,6
GLFEMOC42	GLFEMCZ42	6,3	4,5	42	4,5	80	144	85	30	32	38	147	3,05
GLFEMOC45	GLFEMCZ45	7,8	5,5	45	4,5	90	166	100	35	38	46	168	4,07
GLFEMOC48	GLFEMCZ48	8,6	6,1	48	5	90	166	100	35	38	46	168	5,02
GLFEMOC52	GLFEMCZ52	10	7,1	52	5	100	184	110	38	42	50	187	7,2
GLFEMOC56	GLFEMCZ56	11,5	8,2	56	5,5	100	184	110	38	42	50	187	7,1
GLFEMOC64	GLFEMCZ64	16	11	64	6	110	206	120	42	48	58	208	10
GLFEMOC72	GLFEMCZ72	20	14	72	6	140	260	150	50	60	72	260	19
GLFEMOC80	GLFEMCZ80	28	20	80	6	160	296	170	55	68	80	298	29,6
GLFEMOC99	GLFEMCZ99	40	29	100	6	180	330	190	60	75	88	330	38,4

The sizes in *Italic* are not stated in DIN 582 standard, they comply with a commercial standard

(*) metric tons of 1.000 kg

The sizes in bold character are normally ex stock available.

(**) maximum side load. WARNING: side load is permitted only along the eye's plan