


## Galvanized standard rigging screw eye/eye - art. 6322



* Reference standard	Industrial standard
* Type of steel	Low carbon steel S275JR UNI EN 10027-1 - W.N. 1.0044 (or alike) - class 4
* Design factor (F.O.S.)	4 : 1
* Standard surface finish	Electro galvanized
* Applications	Tensioning, lashing and suspending of loads in industry and marine (light duty)
* Warning	WLL apply for pull along the rigging screw's axe - working temperature -20° to +200° C - please refer to the technical part of rigging screw section for deepening and other warnings
* Remarks	<b>Use for lifting is forbidden!</b>

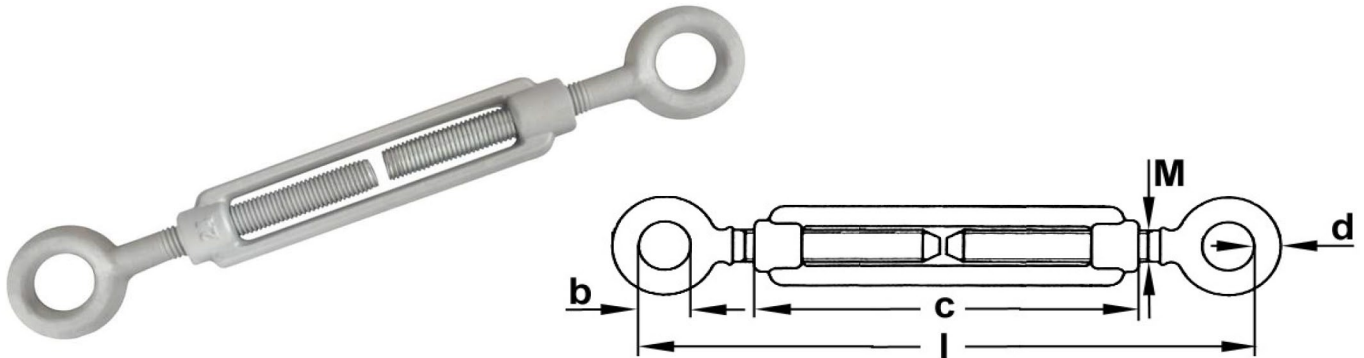

Technical data										
code	size		WLL t <sup>(1)</sup>	approximate length l			measures mm		diameter d	approx. weight per pc. kg
	mm	inch		closed	open	1/2 take up	length c	widht b		
FVTEOO005	5	3/16	0,14	122	176	149	79	8	4	0,04
FVTEOO006	6	1/4	0,19	140	203	171,5	88	10	4	0,06
FVTEOO008	8	5/16	0,35	157	226	191,5	110	11	5	0,15
<b>FVTEOO010</b>	10	3/8	0,56	182	260	221	130	14	6,5	0,21
FVTEOO011	11	7/16	0,68	197	285	241	135	15	7,5	0,31
<b>FVTEOO012</b>	12	1/2	0,82	228	297	262,5	140	17	8	0,34
FVTEOO014	14	9/16	1,13	245	365	305	170	18	8,5	0,5
<b>FVTEOO016</b>	16	5/8	1,55	280	412	346	190	23	13	0,93
FVTEOO018	18	11/16	1,88	324	450	387	200	25	14	1,38
<b>FVTEOO020</b>	20	3/4	2,42	340	470	405	220	25	14	1,42
<b>FVTEOO022</b>	22	7/8	3,03	365	495	430	242	30	16	2,11
<b>FVTEOO025</b>	24	1	3,49	400	565	482,5	255	34	17	2,76
<b>FVTEOO028</b>	27	1.1/8	4,59	445	586	515,5	255	34	18,5	3,91
FVTEOO030	30	1.3/16	5,58	451	595	523	255	38	19,5	4,05
<b>FVTEOO032</b>	33	1.1/4	6,96	452	607	529,5	255	39	21	5,75
FVTEOO036	36	1.3/8	8,16	510	673	591,5	295	48	27	7,25
<b>FVTEOO039</b>	39	1.1/2	9,81	511	690	600,5	330	48	28	9,36
FVTEOO042	42	1.5/8	11,23	575	754	664,5	330	55	40	13,96
FVTEOO045	45	1.3/4	13,16	590	755	672,5	355	55	40	19,1
FVTEOO048	48	1.7/8	14,8	590	755	672,5	355	55	40	19,3
FVTEOO052	52	2	17,76	590	755	672,5	355	55	40	20,6

<sup>(1)</sup> metric tons of 1.000 kg

The sizes in bold character are stock-items.