


Stainless steel standard rigging screw eye/eye - art. 7251



* Reference standard	Industrial standard
* Type of steel	Stainless steel not certified
* Design factor (F.O.S.)	4 : 1
* Standard surface finish	Polished
* Technical features	Welded eyes - high resistance to corrosion
* Applications	Suspension of loads in corrosive atmosphere (marine environment, presence of acid), where the use of stainless steel material is requested (pharmaceutical, food industry), where the use of non-magnetic material is requested (military applications), cruisers, leisure boats
* Warnings	WLL apply for pull along the rigging screw's axe - working temperature -20° to +200° C - please refer to the technical part of rigging screw section for deepening and other warnings
* Remarks	Use for lifting is forbidden!

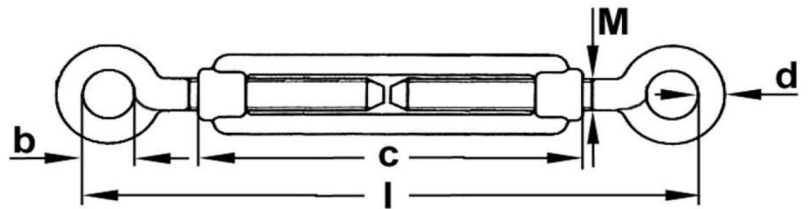

Technical data									
code	size		WLL t ⁽¹⁾	approximate length l		measures mm			approx. weight per pc. kg
	mm	inch		closed	open	width b	length c	diameter d	
AITEOO005	5	3/16	0,13	102	162	8	70	4	0,04
AITEOO006	6	1/4	0,18	132	210	10	90	4	0,08
AITEOO008	8	5/16	0,33	170	270	14	120	5	0,16
AITEOO010	10	3/8	0,52	217	347	16	150	6,5	0,25
AITEOO012	12	1/2	0,76	264	440	18	200	8	0,55
AITEOO016	16	5/8	1,44	344	562	26	250	13	1
AITEOO020	20	3/4	2,25	392	642	30	300	14	1,9

⁽¹⁾ metric tons of 1.000 kg

The sizes in bold character are stock-items.

Art. 7252 (eye/hook) and 7253 (hook/hook) available upon request

We may supply stainless steel rigging screws of any type and dimensions.