


Stainless steel rigging screw with welded jaws - art. 7764/S



* Reference standard	Industrial standard
* Type of steel	Stainless steel not certified
* Design factor (F.O.S.)	4 : 1
* Standard surface finish	Polished
* Technical features	High resistance to corrosion
* Applications	Tensioning and suspension of loads in corrosive atmosphere (marine environment, presence of acid), where the use of stainless steel material is requested (pharmaceutical, food industry), where the use of non-magnetic material is requested (military applications), cruisers, leisure boats
* Warnings	WLL apply for pull along the rigging screw's axe - working temperature -20° to +200° C - please refer to the technical part of rigging screw section for deepening and other warnings
* Remarks	Use for lifting is forbidden!

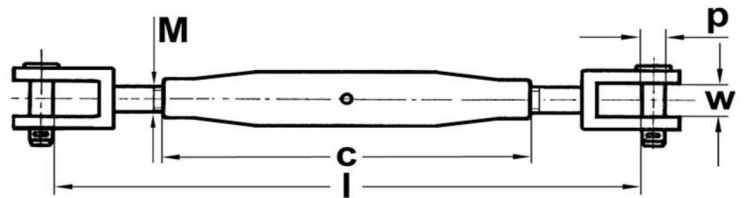

Technical data									
code	size		WLL t ⁽¹⁾	approximate length l		measures mm			approx. weight per pc. kg
	mm	inch		closed	open	length c	width w	pin p	
AITEFFS05	5	3/16	0,13	119	169	60	11	6	0,06
AITEFFS06	6	1/4	0,18	129	194	75	11	6	0,08
AITEFFS08	8	5/16	0,33	139	204	80	11	6	0,16
AITEFFS10	10	3/8	0,52	172	242	85	12	8	0,27
AITEFFS12	12	1/2	0,76	198	288	105	12	12	0,38
AITEFFS14	14	9/16	1,05	248	398	170	13	12	0,68
AITEFFS16	16	5/8	1,44	276	446	190	15	14	1,03
AITEFFS20	20	3/4	2,25	334	504	200	21	16	2,22

⁽¹⁾ metric tons of 1.000 kg

The sizes in bold character are stock-items.

We may supply stainless steel rigging screws of any type and dimensions.